


WP-BF series Premade Pouch Horizontal Feeding Packing Machine

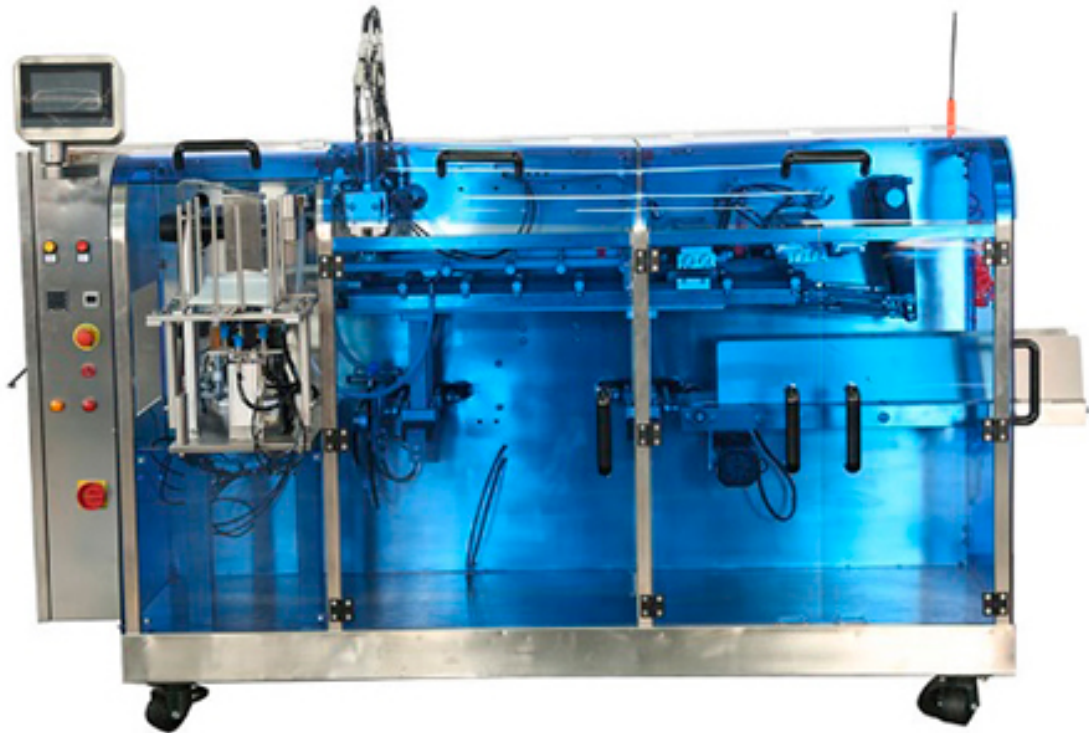

Application

- ◎ Applicable Bag Types: three side seal bag, four side seal bag, standup pouch bag, zipper bag (option) and so on.
- ◎ Applicable Bag Material: multi-layers laminated films, for example: PET/PE. Film thickness 0.05-0.15mm.
- ◎ Applicable Products: a variety of snack food, candy, bean, pet food, dried fruits, sugar, milk powder, coffee powder, etc

Feature

- ◎ PLC control, man-machine interface, easy to operate and maintain.
- ◎ With cushion structure, stable movement with lower noise.
- ◎ Equipped with safety devices, abnormal air pressure shutdown, heat and disconnection alarm etc.
- ◎ Complete detecting function, no bag opening no products filling, no bag sealing.
- ◎ The frame of machine is made of #304 stainless steel, equipped with auto-stop protection function when open the door.

Technical Parameters

| Model | WP-BF160 | WP-BF210 |
|------------------|--------------------------|--------------------------|
| Station Number | 5 stations | 5 stations |
| Bag Size | L*W=(110~230)*(80~160)mm | L*W=(130~330)*(90~210)mm |
| Packing Speed | 5~50 (bags/min) | 0~50 (bags/min) |
| Voltage | 4.5KW/220V/50(60)Hz | 4.5KW/220V/50(60)Hz |
| Gas Pressure | 0.4~0.8MPa | 0.4~0.8MPa |
| Gas Consumption | 0.7m³/min | 0.3m³/min |
| Machine Size(mm) | 1750*1000*1400 | 2200*1100*1400 |
| Machine Weight | 800Kg | 1200kg |

| Model | WP-BF260 |
|------------------|---------------------------|
| Station Number | 5stations |
| Bag Size | L*W=(160~380)*(100~260)mm |
| Packing Speed | 5~50 (bags/min) |
| Voltage | 5KW/220V/50(60)Hz |
| Gas Pressure | 0.4~0.8MPa |
| Gas Consumption | 0.4m³/min |
| Machine Size(mm) | 2700*1550*1550mm |
| Machine Weight | 1500Kg |