




BSE5040A Shrink Tunnel Multi Packaging Machine

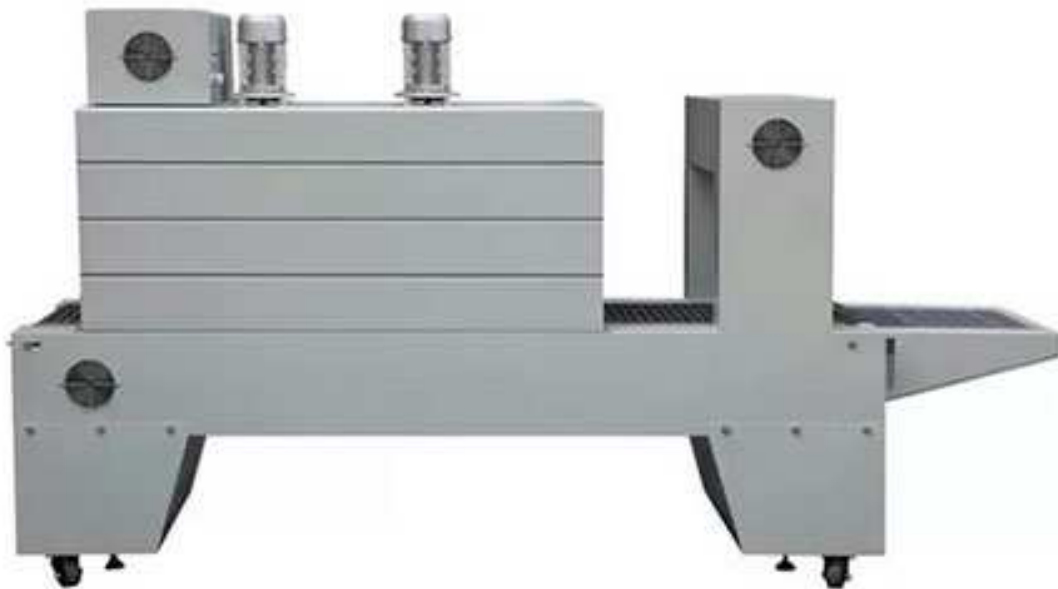

Application:

1. The machine adopts digital temperature controller, which makes operation easier.
2. Quartz heating pipes are located on the top, bottom and sides of the shrinking tunnel.
3. Two fans in electricity box cools down electricity box in order to protect electronics.
4. Conveyor motor cools down by fan underneath.
5. The powerful fan produces even hot airflow inside of shrink tunnel.
6. The speed of the conveyer is adjustable.
7. Conveyor has option of chain roller and iron net conveyor for choice.

Feature:

1. Automatic detection function, unmanned packaging. Automatic feeding, coating and sealing.
2. With intelligent error excision protection device. Higher error prevention device to avoid waste of raw materials.
3. Omron PLC control. International famous brand, long service life.
4. Adjustable aperture punch. It can be adjusted according to user's demand.
5. Sealing and cutting system. It adopts the alloy steel knife which is resistant to adhesion and high temperature.
6. Waste recovery system. Germany SICK sensor and "SKG" motor ensure accurate and uniform recovery of waste.

Technical information:

Model	BSE5040A
Power supply	3phase 220V/380V 50/60HZ
Heater power	20KW
Conveyor speed	0-10m/minute
Tunnel size(L*W*H)	1500*500*460MM
Conveyor loading	25KGS
Machine size	2500*820*1680MM
Machine weight	470KG
Film material	PE, POF, PVC, PP