


CX-PMT Automatic Top Labeling Machine

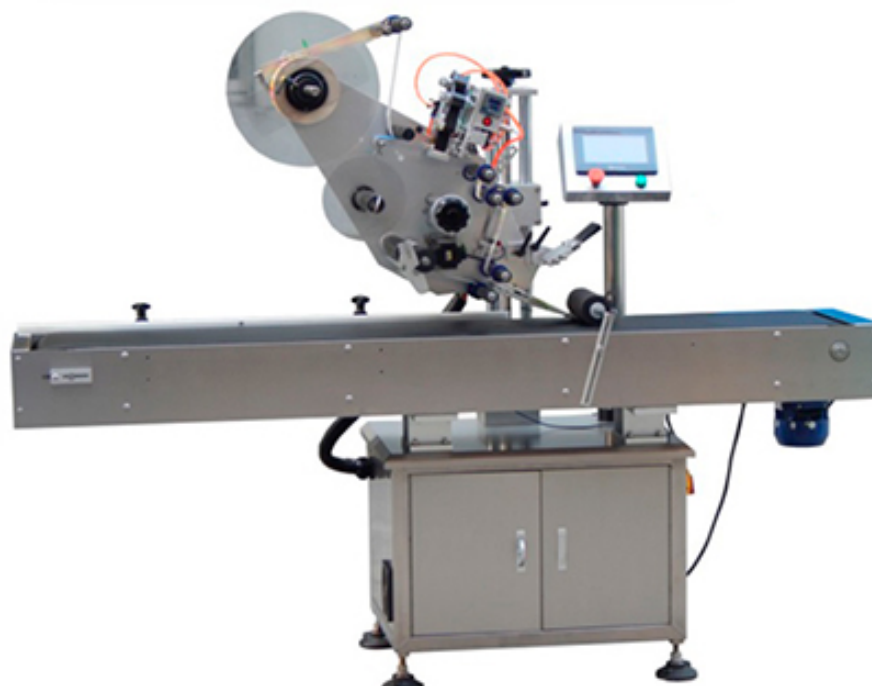

Applicable to the pharmaceutical, cosmetic, food and packing and so on a variety of industries in rigid package or soft packing material of flat surface and uneven surface automatic labeling.

Function Characteristics

- Applicability is wide and can meet the product width 30mm~350mm flat labeling and dry film, replaced by the institutions can meet the uneven surface of the label
- Applicability is wide and can meet the product width 30mm~350mm flat labeling and dry film, replaced by the institutions can meet the uneven surface of the label
- High stability, Mitsubishi PLC+Delta touch screen + Japan omron needle advanced electronic control system of electric eye, 7×24 hour support equipment operation
- Function is powerful, have production count function, power function, set number production function, parameter setting protection function, easy production management

Technical Parameters

Voltage	AC110/220V, 50/60HZ
Labeling Speed	20-70 pcs/min
Object Size	30-200mm (H), 20-200mm(W)
Label Size	20-280mm (L), 20-130mm(W)
Driving Mode	Servo or stepping motor
Labeling Accuracy	±1mm (Depend on the evenness of the plane)
Printer toUseAir	5 kg/cm ²
Roll Size	Inner: φ76mm,Outer: φ300mm
Dimension	2000mm(L)×750mm(W)×1400mm(H)