


Al Foil EPE Sealing Machine SKM-B1/B2/B3

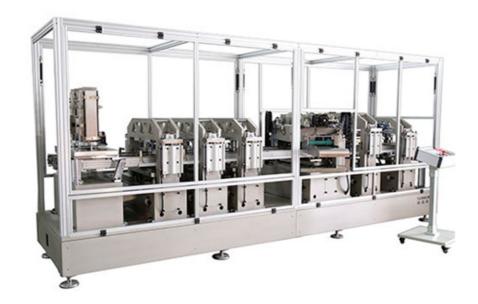

This machine can be used to manufacture 202-603# easy-tear lid, and especially suitable for bigger 307-603# iron easy-tear lid, It can automatically complete the functions of cover feeding, punching, deep drawing, crimping, aluminum foil pre-sealing, sealing, embossing and output etc. Independent servo controls each function module, adjusts parameters separately, and achieves high-speed response and synchronous movement. Inclined punching arrangement makes the aluminum foil waste least.

Features:

- Fully Automated with its Ability to Integrate Various Processes
- Touch Screen System with PLC Controller.
- Temperature controller regulates and shows the temperature.
- Work in high speed that the fastest speed can reach 200 can/hour each unisea.
- High pressure, low temperature and the pressure-holding time is short which make highly seal.
- An Emboss is followed by any other processes that are customized according by the manufacturer's needs.

Technical Parameters

Model	SKM – B1	SKM – B2	SKM – B3
Channels	1	2	3
Suitable Lip type	502-603#	202-603#	202-211#
Capacity	50-60	100-120	150-180
(Pcs/ min)			
Total Power (KW)	38 (25)	50 (35)	55 (40)
Air Consumption	0.5	0.8	1.2
(Cubic meters/ min)			
Weight (KG)	6000(4500)	7000(5000)	7500(5500)
Overall dimensions	4800(3500)*1500*2200	4800(3500)*1500*2200	4800(3500)*1500*2200