


Double-side Labeling Machine (Top and Bottom)

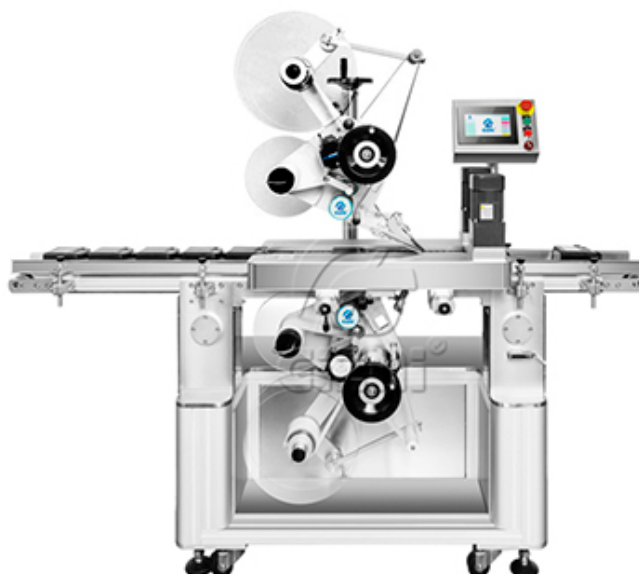

Apply to product or outer package top-bottom of petro-chemical, medicine, electric, foodstuff ect and other industrial for automatic labeling. By adjust label of different specifications, enhancing manual holding label instruction, can achieve label on the corner of top bottom.

Features

1. Keeping labeling parameter: according to different container or label setting and keep the parameter in advance, for future use, no need for setting each time;
2. Makes more precision on orientate;
3. Can be matched with Heat transfer printing, hot soup printer or ink jet, Synchronization completed coding and labeling.
4. Available for adding machinery vision monitoring system, detecting printing date and batch automatically .avoid missing label, incorrect label, duplicate label cased by label. roll. Label used on Intelligent Management, it would be warm or stop when out of the label.
5. Adopt by forever non deforming, good friction, make sure non-slip High precision of feeding label.
6. Apply to petro-chemical, foodstuff and other industrial for inner cap label, steady speed up to 80 cases /min.

Technical Parameters

Dimension (reference)	2180mm(L)*810mm(W)*1600mm(H)
Label Speed	50-250 pcs/min
Labeling precision	±1.0mm
Material size	30-340mm(W)/10-280mm(H)
Operating ambient temperature	5-45°C
Stop labeling accuracy	±0.3mm
Environmental humidity	15-90% (non-condensing)
Belt width	91mm